


Ultra-low noise polarization diversity coherent reception module UPDR-1.5G-A

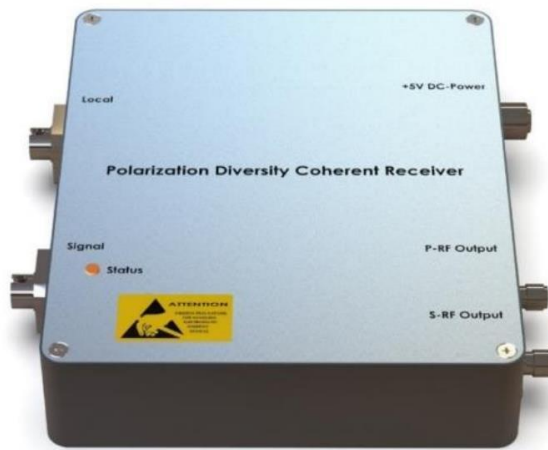

● Product Description

The ultra-low noise polarization diversity receiver module is designed for polarization-sensitive fiber optic sensing applications. This module coherently processes the two polarization states of the local oscillator and signal light separately, using two high-speed, low-noise balanced detectors for independent reception. It effectively solves the issue of coherent polarization states. This series is an upgrade of the original PDR series, significantly reducing the background noise, thereby providing higher signal-to-noise ratio for signal detection.

● Part Number

UPDR-1.5G-A

● Product features

High Bandwidth、 High Gain、 Ultra-low noise、 Built-in low-noise isolation power supply

● Application area

Fiber optic sensing、 Laser wind radar、 Optical coherence tomography、 Spectroscopy


Parameters

General Parameters


PN#	UPDR-100M-A	UPDR-200M-A	UPDR-300M-A	UPDR-400M-A	UPDR-500M-A	UPDR-800M-A	UPDR-1G-A	UPDR-1.2G-A	UPDR-1.5G-A	UPDR-2G-A	UPDR-2.5G-A	Unit
Wavelength	1510~1590 (1300±50nm; 1060±50nm Optional)											nm
Bandwidth	100M	200M	300M	400M	500M	800M	1G	1.2G	1.5G	2G	2.5G	Hz
Detector Responsivity	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	A/W@1550nm
Transimpedance Gain	30K	30K	30K	20K	10K	30K	30K	30K	30K	30K	30K	V/A
Input Light	Local	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	mW
	Signal	300	300	300	300	300	300	300	300	300	300	μW
Polarization Extinction Ratio	22	22	22	22	22	22	22	22	22	22	22	dB
NEP	2.5	2.5	2.5	2.9	3.1	3.1	3.1	3.1	3.1	3.1	3.1	pW/Sqrt(Hz)
Power Supply Voltage	5	5	5	12	12	12	12	12	12	12	12	V

Power Supply Current	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	A
Coupling Method	DC/AC	DC/AC	DC/AC	DC/AC	DC	AC	AC	AC	AC	AC	AC	
Interface Type	Electrical interface: SMA; fiber connector: FC/APC											
Fiber Type	Local:PM; Signal:SM											
RF Output	SMA											
Dimensions	120*100*25mm											


Test result

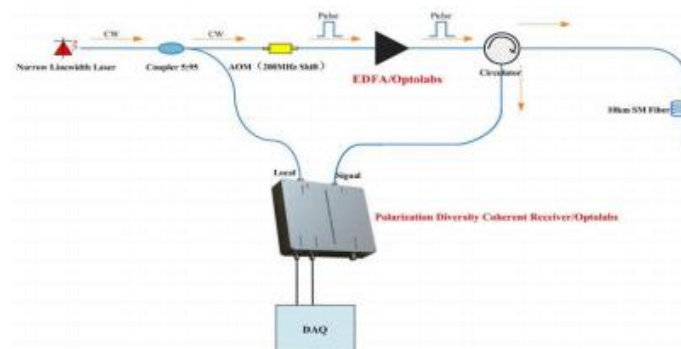

Polarization Diversity Coherent Reception Optical Circuit Diagram

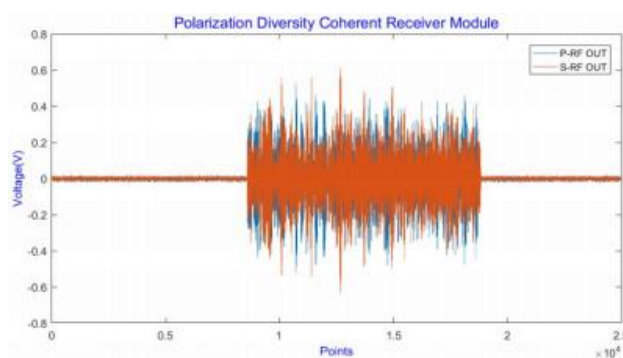

Coherent signals of P-polarized and S-polarized states.

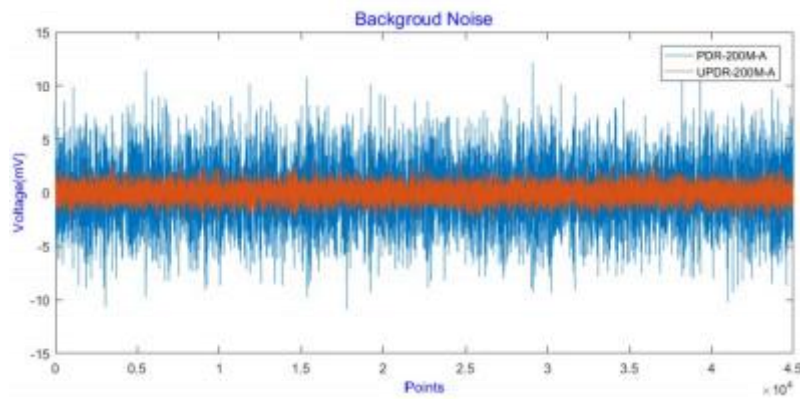

Comparison of the base noise between ultra-low noise polarization diversity and conventional polarization diversity