


InGaAs ultra-low noise unit detector

UPD-500M-A

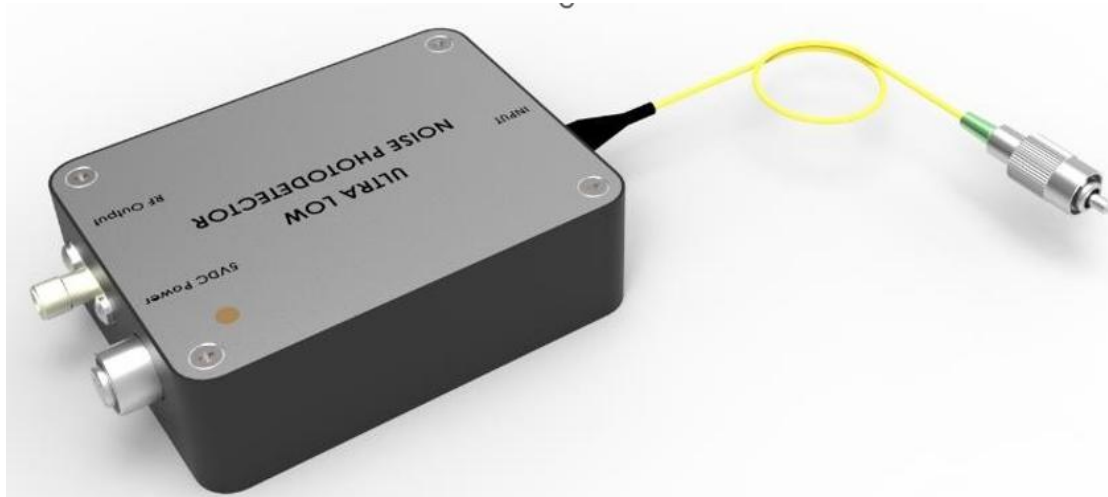

● Product Description

The ultra-low noise photodetector module integrates an ultra-low noise analog PIN photodetector, a low-noise broadband transimpedance amplifier, and an ultra-low noise isolated single power supply. The output signal is unaffected by external power supply sources. This module is particularly outstanding in terms of background noise control, with its background noise being approximately one-third of that of conventional modules under the same parameters, effectively meeting customers' needs for smaller signal detection and higher signal-to-noise ratio.

● Part Number

UPD-500M-A

● Product features

WUltra-low noise、High gain、High bandwidth、Compact structure、Built-in low-noise isolated power supply

● Application area

Fiber optic sensing、Fiber optic communication、Laser ranging、Spectral measurement、Nanosecond level optical pulse detection


Parameters

PN#	UP D-1 00 M- A	UP D-2 00 M- A	UP D-3 00 M- A	UP D-4 00 M- A	UP D-5 00 M- A	UP D-6 00 M- A	UP D-8 00 M- A	UP D- 1G -A	UP D- 1.2 G- A	UP D- 1.5 G- A	UP D- 2G -A	UP D- 2.5 G- A	UP D- 5G -A	Uni t
Det ecto r Typ e	InGaAs													
Wav elen gth	800~1700													nm
Ban dwi dth	100 M	200 M	300 M	400 M	500 M	600 M	800 M	1G	1.2 G	1.5 G	2G	2.5 G	5G	Hz
Det ecto r Res pon sivi ty	0.9 5	0.9 5	0.9 5	0.9 5	0.9 5	0.9 5	0.9 5	0. 95	0.9 5	0.9 5	0. 95	0.9 5	0. 95	A/ W @1 550 nm
Tran sim ped ance Gain	30K	30K	30K	20K	15K	15K	30K	30 K	30 K	30 K	30 K	30 K	6K	V/ W


Saturation Optical Power	140	140	140	420	280	280	140	140	140	420	140	140	700	μ W
NEP	2.2	2.2	2.2	2.7	3.1	3.1	3.3	3.3	3.3	3.3	3.3	3.3	3.3	pW/Sqrt(Hz)
Output Impedance	50	50	50	50	50	50	50	50	50	50	50	50	50	Ω
Output Coupling	DC/AC	DC/AC	DC/AC	DC/AC	DC	DC	AC	AC	AC	AC	AC	AC	AC	
Power Supply Voltage	5	5	5	5	5	12	12	12	12	12	12	12	12	V
Power Supply Current	0.5 (max)	0.5 (max)	0.5 (max)	0.5 (max)	0.5 (max)	0.5 (max)	0.5 (max)	0.5 (max)	0.5 (max)	0.5 (max)	0.5 (max)	0.5 (max)	0.3	A
Optical Input	FC/APC (Free space option available)												FC/APC	
RF Output	SMA												SMA	

Dimensions	65*50*20	65*50*25	80*90*25	mm
------------	----------	----------	----------	----

Test Result

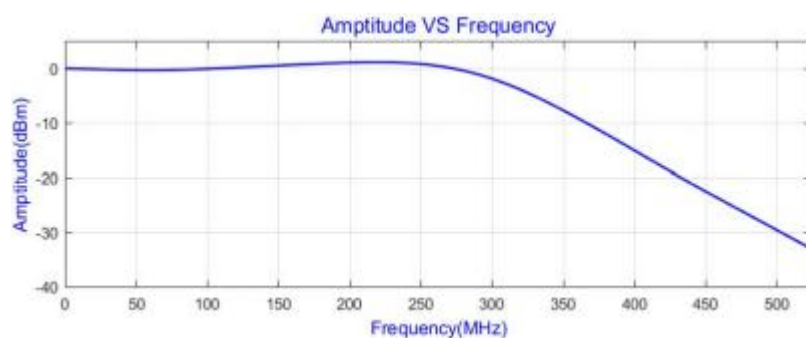

300MHz ultra-low noise unit detector

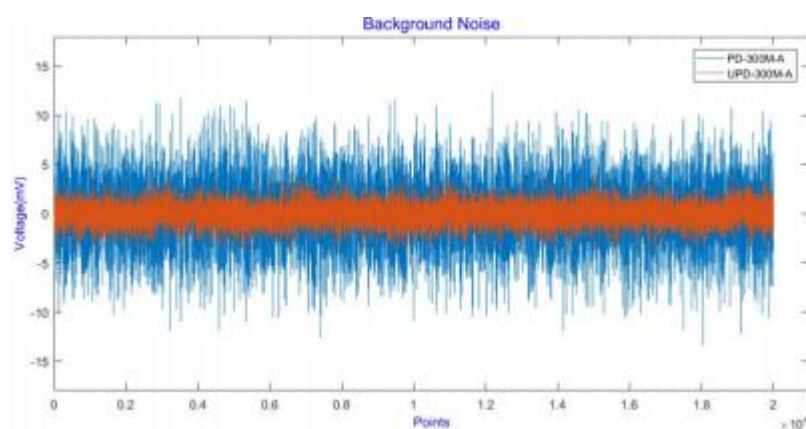

Comparison of the Ultra-Low Noise Unit Detector with Conventional Unit Detector in Terms of Background Noise