

InGaAs ultra-low noise balance detector UBD-1.5G-A



● Product Description

The UBD series ultra-low noise balanced detection module is an upgraded product based on the original MBD series. Compared with the original MBD series, its background noise is significantly reduced under the same other parameters. Under the same bandwidth and gain conditions, its background noise is about one-third of the MBD series module, so it has higher sensitivity and higher signal-to-noise ratio.

● Part Number

UBD-1.5G-A


● Product features

Ultra-low noise、 High gain、 High bandwidth、 Compact structure、 Built-in low-noise isolated power supply

● Application area

Distributed fiber optic sensing 、 Laser wind radar 、 Optical coherence tomography、 Spectral measurement、 Level optical pulse detection

Dimensional Drawing

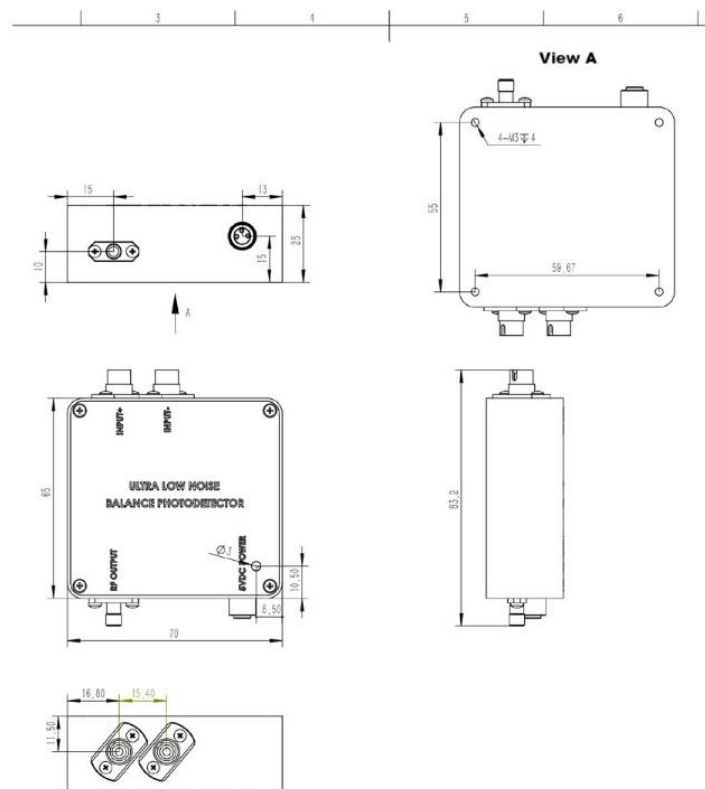


Parameters

PN#	UBD -100 M-A	UBD -200 M-A	UBD -300 M-A	UBD -400 M-A	UBD -500 M-A	UBD -800 M-A	UB D-1 G-A	UB D-1. 2G-A	UB D-1. 5G-A	UB D-2 G-A	UB D-2.5 G-A	Unit
Dete ctor type	InGaAs											


Wave length	800~1700											nm
Band width	100 M	200 M	300 M	400 M	500 M	800 M	1G	1.2 G	1.5 G	2G	2.5 G	Hz
Dete ctor respo nsivit y	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	A/W @1550nm
Trans impe danc e gain	30K	30K	30K	20K	10K	30K	30 K	30K	30K	30 K	30 K	V/W
Maxi mum input opti cal powe r	140	140	140	210	420	140	140	140	140	140	140	μ W
NEP	2.5	2.5	2.5	2.9	3.1	3.1	3.1	3.1	3.1	3.1	3.1	pW/Sqrt(Hz)
Com mon mode reject ion ratio	>30	>30	>30	>30	>30	>30	>30	>30	>30	>30	>30	dB
Outp ut impe danc e	50	50	50	50	50	50	50	50	50	50	50	Ω
Outp ut coupl ing mode	DC/ AC	DC/ AC	DC/ AC	DC/ AC	DC	AC	AC	AC	AC	AC	AC	

Supply voltage	5	5	5	5	5	12	12	12	12	12	12	V
Supply current	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	0.5(max)	A
Optical input	FC/APC (Free space optional)											
RF output	SMA											
Dimensions	80*90*25											mm

Test results:

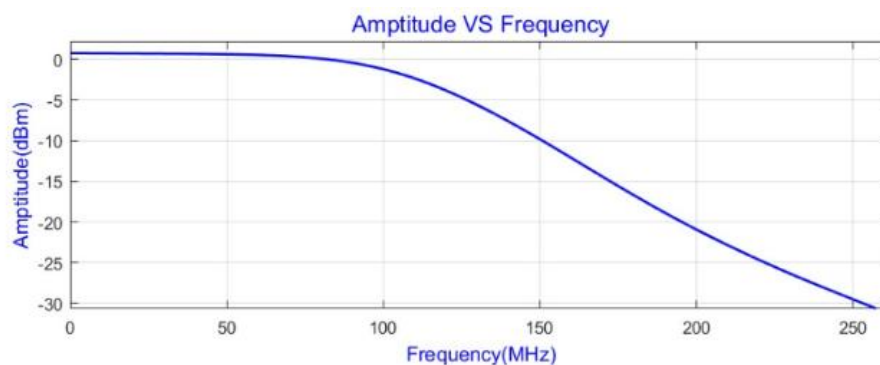

300MHz bandwidth corresponding curve

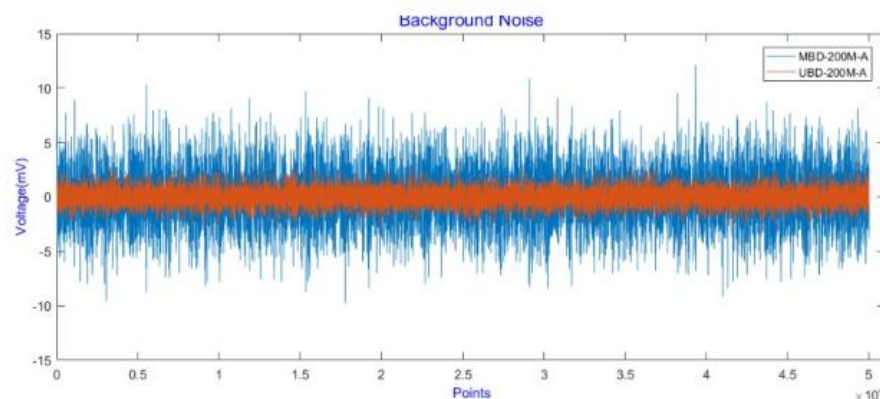

Comparison of noise floor between ultra-low noise balanced detector and conventional balanced detector