

840±123nm Ultra-Wideband Single-Mode Fiber Coupler (OCT Field)



● Product Description


840±123nm Ultra-Wideband SM Fiber Coupler (OCT Field)

● Part Number

FOC-840-260-SA-OCT

Parameters

Dimensional Drawing

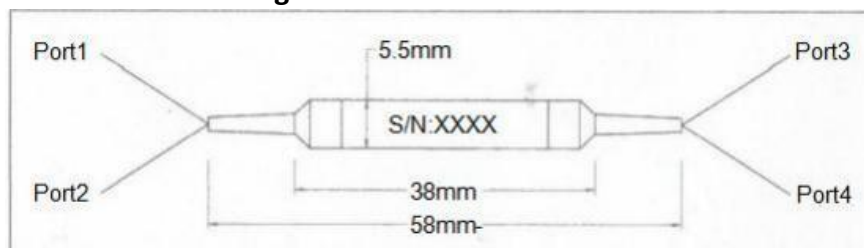

General Parameters

Parameter	Unit	Specs	Data
Port Configuration	/	2x2	2x2
Central Wavelength	nm	850	850
Operating Wavelength	nm	720-980	720-980
Max. Insertion Loss (Port 1 to Port 2 and Port 3)	dB	4.7/4.7	3.40/3 .30
Coupling Ratio (Port 1 to Port 2 and Port 3)	%	50%/50%	49.4%/50 .6%
Max. Insertion Loss (Port 4 to Port 3 and Port 2)	dB	4.7/4.7	3.37/3 .57
Coupling Ratio (Port 4 to Port 3 and Port 2)	%	50%/50%	51.2%/48 .8%
Max. Excess Loss (Port 1 to Port 2 and Port 3)	dB	1.7	0.33
Max. Excess Loss (Port 4 to Port 3 and Port 2)	dB	1.7	0.45
Max. PDL (Port 1 to Port 2 and Port 3)	dB	0.1	0.02
Max. PDL (Port 4 to Port 3 and Port 2)	dB	0.1	0.02
Min. Return Loss	dB	45	56
Fiber Type	/	780-OCT	
Fiber Protection Sleeve	/	900μm fiber jacket (white)	
Fiber Length	m	1.0 ± 0.01	
Connector Type	/	FC/APC	
Max. Optical Power (CW)	mW	300	
Max. Tensile Load	N	5	
Operating Temperature	°C	0 to 70	
Storage Temperature	°C	-40 to 85	
Packaging Dimensions	mm	φ 5.5xL38	