

10.26um High Power Desktop DFB-QCL Mid-Infrared Quantum Cascade Laser 50mW (Bench top Light Source)



● Product Description

QCL10260-DFB-10.26um High Power Desktop DFB-QCL Mid-Infrared Quantum Cascade Laser is a mid-infrared test laser developed by Idealphotonics in the first half of 2019. Its low loss at the atmospheric window makes it advantageous for space optical communication testing and research. Our Benchtop light source has high power and does not require ITAR review, making it an excellent choice for commercial mid-infrared testing light sources. With a tunable range of over 100nm and an output power greater than 100mW, it meets the industrial testing requirements of our customers. Our laser has an integrated ZnSe collimated output, with stable output power and superior temperature and wavelength stability compared to traditional high-power quantum cascade lasers, offering several orders of magnitude better stability

● Part Number

LDC-MIR-QCL-W10260-1-DFB-050

● Product features

High power、 Compact structure、 Software intelligent control、 Built-in FPGA

● Application area

Mid-infrared test light source、 Mid-infrared device analysis

Parameters

Tuning Parameters


Technical Parameters	Unit	Technical Specification		
		Min.	Typ.	Max.
PN#		QCL102600		
Output Power 1	mW	100	-	50
Peak Operating Wavelength 2	um	10.2	10.26	10.27
Spectral Width (FWHM)	MHZ	-	3	-
Output Side Mode Suppression Ratio (SMSR)	dB	30	-	-
M ² Factor			<1.2	
Output Beam Divergence Angle	Mrad		<2	
Beam Waist Diameter at Output 5	mm		<4	
Output Isolation 3	dB	-	30	-
Wavelength Temperature Coefficient	nm/K		1.00	
Wavelength Current Coefficient	nm/A		57.1	
Output Power Stability (15 Minutes) 4	%	-	±0.5	±1.0
Output Power Stability (8 Hours) 4	%	-	±1.0	±2.0
Output Power Adjustable Range	%	0	-	100
Output Power Adjustment Mode		Software Control		
TEC Stability	℃	-	±0.1	±0.2
TEC Operating Range	℃	0	30	50
Operating Voltage	VAC	100	220	240
Electrical Power Consumption 5	W	-	-	5
Operating Temperature	℃	0	-	55
Storage Temperature	℃	-20	-	65

Technical Specifications Notes:


1. Output Power: Optional.
2. Peak Operating Wavelength: Optional.
3. Output Power Stability Test Condition: Conducted at 25°C after 30 minutes of warm-up.
4. Maximum Power Consumption: Refers to the overall power consumption under extreme operating conditions.
5. $I = 0.80 \text{ A}$, $V = 8.7 \text{ V}$, $T = 15^\circ\text{C}$, Measured at $1/e^2$




Laser Spectrum (Continuous)

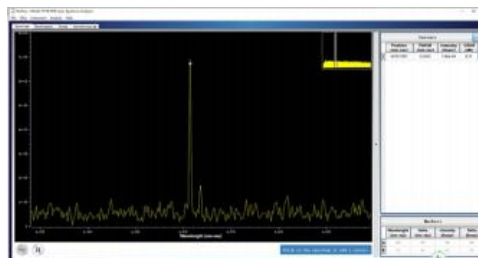


Wavelength Tuning Curve

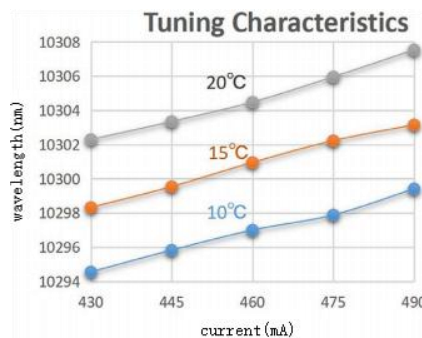


Wavelength Stability Curve

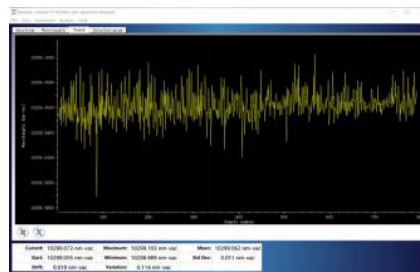


QCL Laser Characteristic Curve (Typical Wavelength 10.26um Example)
 Output Power Characteristic Curve

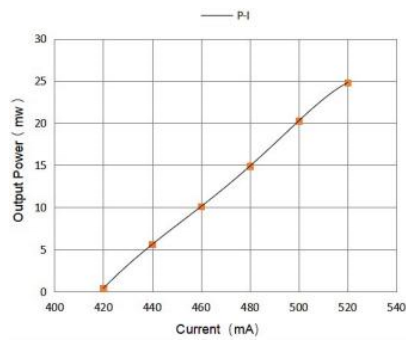


Power Stability Curve

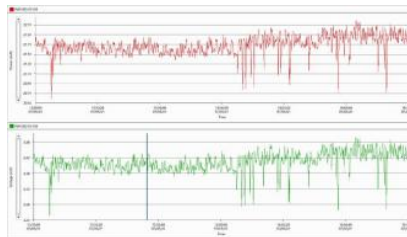

Power Stability Curve

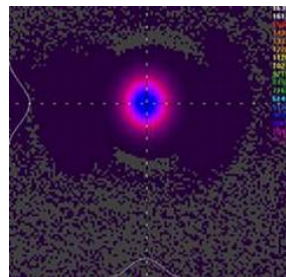


2-D Beam Profile at 1778 mm (70.0 in)

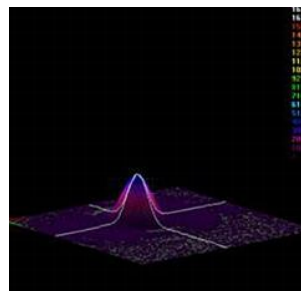

3-D Beam Profile at 1778 mm (70.0 in)

Mid-infrared atmospheric windowD

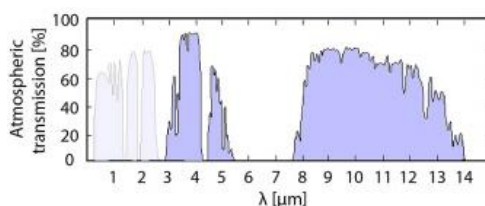

PN#/Ordering info

MIR-QCL- W□□□□ -☆-△-XX

W□□□□: Wavelength

4000: 4000nm 4600: 4600nm 9000: 9000nm

☆ : Collimated output

1: With

0: Without

△ : Laser type

FP: QCL-FP

DFB: QCL-DFB

XX: Output power

001=1mw

010=10mw

400=400mw

1000=1000mw

CW Distributed Feedback (DFB) Quantum Cascade Laser

* Center wavelength measured at T = 15°C under continuous wave

* Center wavelength tuning range: +/- 0.03 μm

* Other center wavelengths are listed in the table +/- 100 nm We can provide screening services

* Other center wavelengths can be customized, minimum order quantity: 5 pieces

The wavelengths we can currently provide are as follows*

Wavelength h(μm)	Wave number(cm-1)	Output power(mW)	Wavelength gth(μ m)	Wave number(cm-1)	Output power(mW)	Wavelength gth(μ m)	Wave number(cm-1)	Output power(mW)
4.22	2370	> 50	6.25	1600	> 100	9.38	1066	> 100
4.28	2336	> 50	7.15	1399	> 100	9.47	1056	> 150
4.32	2315	> 50	7.26	1377	> 100	9.49	1054	> 150
4.34	2304	> 50	7.32	1366	> 100	9.52	1050	> 200

4.45	2247	> 80	7.37	1357	> 100	9.56	1046	> 200
4.48	2232	> 80	7.43	1346	> 150	9.63	1038	> 150
4.53	2208	> 150	7.57	1321	> 150	9.66	1035	> 100
4.56	2193	> 150	7.61	1314	> 150	9.68	1033	> 100
4.59	2179	> 150	7.75	1290	> 300	9.72	1029	> 100
4.61	2169	> 100	7.78	1285	> 300	9.95	1005	> 100
4.72	2119	> 100	7.80	1282	> 300	10.24	977	> 150
5.18	1931	> 150	7.82	1279	> 300	10.26	975	> 150
5.26	1901	> 150	7.85	1274	> 300	10.28	973	> 150
5.66	1767	> 300	8.01	1248	> 100	10.32	969	> 150
5.73	1745	> 150	8.28	1208	> 200	10.36	965	> 150
6.13	1631	> 150	9.02	1109	> 100	10.54	949	> 100
6.15	1626	> 150	9.05	1105	> 100	10.60	943	> 80
6.18	1618	> 100	9.26	1080	> 100	10.63	941	> 80

Pulsed Distributed Feedback (DFB) Quantum cascade lasers

Wavelength(μm)	Wave number(cm ⁻¹)	Output power(mW)	Wavelength(μm)	Wave number(cm ⁻¹)	Output power(mW)	Wavelength(μm)	Wave number(cm ⁻¹)	Output power(mW)	Wavelength(μm)	Wave number(cm ⁻¹)	Output power(mW)
3.399	2942	4.453	2245	5.193	1925	6.135	1629	7.788	1284	9.489	1053
3.402	2939	4.457	2243	5.214	1917	6.143	1627	7.795	1282	9.509	1051
3.45	2898	4.461	2241	5.224	1914	6.153	1625	7.809	1280	9.529	1049
3.451	2897	4.465	2239	5.233	1910	6.156	1624	7.819	1278	9.544	1047
3.477	2876	4.471	2236	5.24	1908	6.17	1620	7.831	1276	9.586	1043
3.48	2873	4.475	2234	5.244	1906	6.177	1618	7.857	1272	9.598	1041
3.497	2859	4.479	2232	5.25	1904	6.214	1609	7.869	1270	9.623	1039
3.519	2841	4.483	2230	5.255	1902	6.225	1606	7.887	1267	9.634	1037
3.536	2828	4.485	2229	5.261	1900	6.228	1605	7.906	1264	9.655	1035

3.538	2826	4.48 9	2227	5.264	1899	6.242	1602	7.93 3	1260	9.672	1033
3.546	2820	4.49 2	2226	5.266	1898	6.243	1601	7.98 6	1252	9.692	1031
3.549	2817	4.49 8	2223	5.272	1896	6.258	1597	7.99 8	1250	9.72	1028
3.566	2804	4.50 1	2221	5.279	1894	6.262	1596	8.01 6	1247	9.744	1026
3.568	2802	4.50 6	2219	5.289	1890	7.148	1398	8.02 6	1245	9.903	1009
3.605	2773	4.50 9	2217	5.294	1888	7.164	1395	8.05 4	1241	9.921	1007
3.607	2772	4.51 3	2215	5.304	1885	7.176	1393	8.10 1	1234	9.943	1005
3.655	2735	4.51 7	2213	5.306	1884	7.185	1391	8.16 3	1225	9.964	1003
3.724	2685	4.52 1	2211	5.452	1834	7.195	1389	8.22	1216	9.983	1001
4.184	2390	4.52 5	2209	5.486	1822	7.205	1387	8.24 2	1213	10.00 1	999
4.185	2389	4.52 9	2207	5.523	1810	7.217	1385	8.25 2	1211	10.02 9	997
4.188	2387	4.53 4	2205	5.557	1799	7.229	1383	8.26 5	1209	10.04 2	995
4.194	2384	4.53 8	2203	5.592	1788	7.258	1377	8.28 2	1207	10.06 3	993
4.197	2382	4.54 3	2201	5.612	1781	7.268	1375	8.29 2	1205	10.19	981
4.2	2380	4.54 5	2200	5.626	1777	7.285	1372	8.30 1	1204	10.20 6	979
4.204	2378	4.55	2197	5.632	1775	7.289	1371	8.32 6	1201	10.23 8	976
4.207	2376	4.55 4	2195	5.639	1773	7.327	1364	8.33 5	1199	10.25 9	974
4.215	2372	4.56	2192	5.646	1771	7.337	1362	8.35 2	1197	10.28 9	971
4.219	2370	4.56 5	2190	5.651	1769	7.348	1360	8.38 6	1192	10.32 7	968
4.221	2369	4.56 9	2188	5.657	1767	7.354	1359	8.90 2	1123	10.34 2	966

4.226	2366	4.57 4	2186	5.665	1765	7.367	1357	8.94 8	1117	10.37 7	963
4.231	2363	4.57 7	2184	5.669	1763	7.373	1356	9.00 4	1110	10.39 6	961