


Dual-Axis Polarization-Maintaining Wavelength Division Multiplexer Module 16 Channels 100 GHz FC/UPC

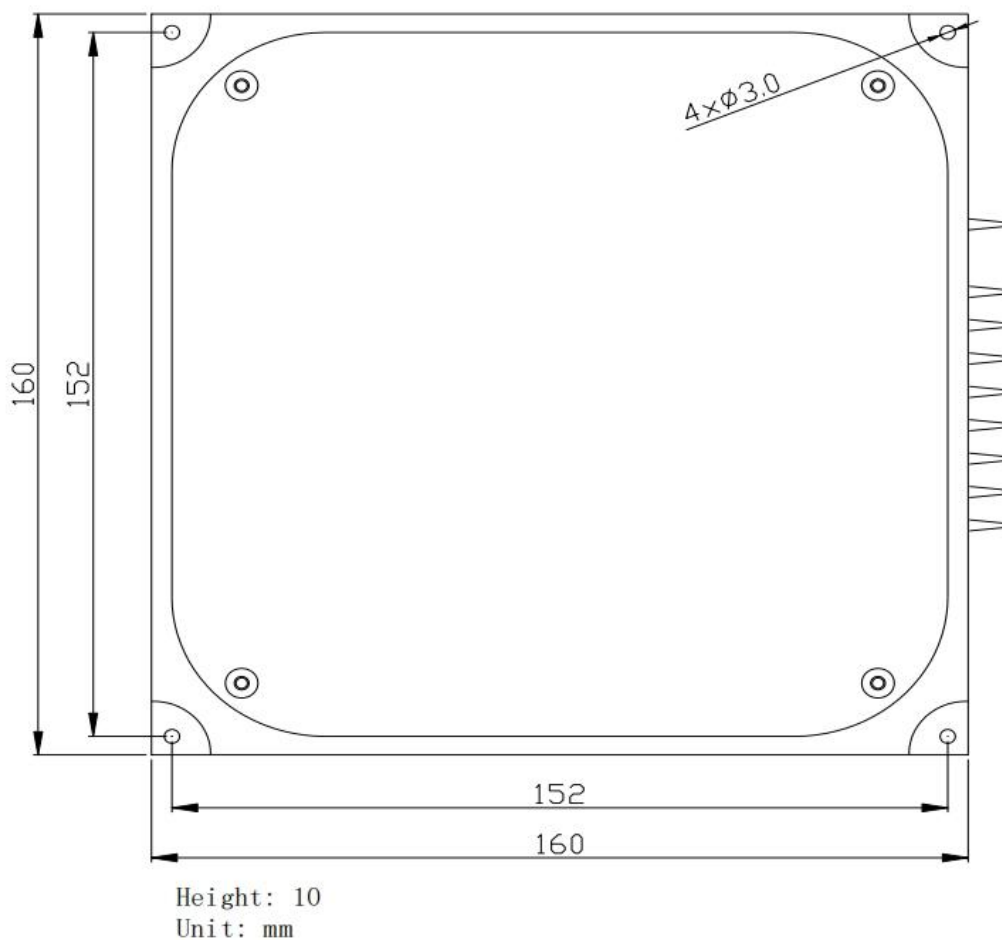

● Product Description




Dual-axis polarization-maintaining wavelength division multiplexer module
4-16 channels

● Part Number

PMDWDM-M-16-1-XX-1A-C-2A-0.8-76

Parameters

Dimensional Drawing

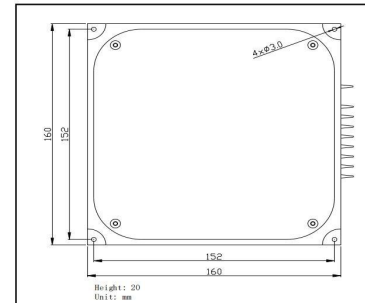

General parameters

Parameter		Unit	Values		
Filter Type		-	100GHz ($\pm 0.11\text{nm}$), or 200GHz ($\pm 0.25\text{nm}$)		
Aisle		nm	4-channels	8-channels	16-channels
Insertion loss		dB	≤ 2.2	≤ 3.2	≤ 4.5
Passband flatness		dB	≤ 0.5		
Channel Isolation (Mux)		dB	NA		
Channel Isolation (Demux)	Adjacent	dB	≥ 25		
	Non-adjacent	dB	≥ 40		
Polarization extinction ratio		dB	≥ 18	≥ 17	≥ 16
Directionality		dB	≥ 50		
Return loss		dB	≥ 45		
Central wavelength stability		nm/ $^{\circ}\text{C}$	≤ 0.002		
Thermal stability		dB/ $^{\circ}\text{C}$	≤ 0.005	≤ 0.006	≤ 0.008
Max. Optical Power (CW, Total)		mW	500		
Tensile load		N	5		
Fiber Type		-	PM Panda Fiber		
Operating temperature		$^{\circ}\text{C}$	-5 to +70		
Storage temperature		$^{\circ}\text{C}$	-40 to +85		
Packing size		mm	160x140x10 for 4 Channels, or Specify		
			160x160x10 for 8 Channels, or Specify		
			160x160x20 for 16 Channels, or Specify		

*The above specifications apply to modules without connectors.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER

will be 2dB lower.

*PM fiber and connector keys are aligned with the slow axis.

Model Description

PMDWDMM-①-②-③-④④-⑤-⑥-⑦⑦-⑧-⑨⑨

①: Model Type

M - MUX

D - DEMUX

②: Number of Channels

4 - 4 Channels

8 - 8 Channels

16 - 16 Channels

③: Channel Spacing

1 - 100 GHz

2 - 200 GHz

④④: First ITU Grid

XX - First ITU Channel

⑤: Connector Type

1A- FC/UPC

2A - FC/APC

3D - SC/UPC

4D - SC/APC

N - None S - Specify

⑥: Fiber Jacket Type

B - Bare Fiber

C - 900um Losse tube (Red)

D - 900um Losse tube (Blue)

S - Specify

⑦⑦: Fiber Type

2A - PM1550 Fiber

S - Specify

⑧: Fiber Length

0.8 - 0.8m

S - Specify



⑨⑨: Package Dimensions

67 - 160x140x10mm

68 - 160x160x10mm

76 - 160x160x20mm

S - Specify

