

Raman laser FBG fiber Bragg grating 1240/1270/1484nm



● Product Description


Efficient multi-stage Raman lasers based on phosphosilicate fibers can be created at different wavelengths. The Raman shift of 1330 cm⁻¹ is approximately three times greater than that of Ge doped fibers. The output emission spectra of two cascaded 1.48 μm Raman fiber lasers are shown in the figure.

● Part Number

GTL-FBG-RL-880

Parameters

FBG Characteristics	GTL-FBG-RL-880	Tolerance/Notes
Wavelength Range nm	1240, 1270, 1484	$\pm 0.1 \sim \pm 1$ custom
Fiber type	SM、PM、Double cladding、LMA	Or custom
Reflectivity, %	5 ~ 99,9	2 ~ 5 custom
Bandwidth (FWHM), nm	0.15~ 1,2	custom
SLSR,dB	~8	or custom
FBG pigtail length, m	≥ 0.5	or custom
FBG inscription thought the fiber protective coating	Acrylate, polyimide	or custom
FBG Recoating	None, acrylate, polyimide	or custom
Tensile Strength, Kpsi	>100	or custom
Optical Connectors	Bare fiber, FC/APC, LC/APC	or custom

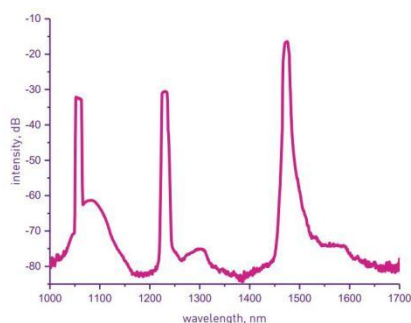

Special application fiber Bragg gratings (FBG) include

Wavelength locker FBG
 WDM ITU filter 100/200 GHz FBG
 Raman laser FBG
 Fabry-Perot interferometer FBG
 High-temperature resistant fiber Bragg grating
 Radiation-resistant FBG

The application range of the special FBG series:

External reflector for laser diodes
 Filtering optical signals
 Optical add/drop multiplexers in WDM systems
 Measuring minute temperature or strain changes

Evaluating small vibrations or sound signals

Multi-stage Raman lasers

High-temperature applications

Nuclear industry

Aerospace

GTL-FBG-WL-810 Wavelength-Locking Fiber Bragg Grating

Used as an external reflector for laser diodes. With the help of these FBGs, it is easy to stabilize the wavelength generation of pump semiconductor lasers and single-frequency lasers. Low-reflection gratings with a Full Width at Half Maximum (FWHM) bandwidth of 0.3 nm to 0.8 nm and a reflectivity of 2% to 5% are ideal for stabilizing pump power in lasers. FBGs with a FWHM bandwidth of around 0.1 nm and a reflectivity of 10% to 20% are placed near the semiconductor laser crystal to create single-frequency sources. FORC Photonics offers wavelength-locking FBGs with highly precise wavelength positions (up to ± 0.02 nm).

GTL-FBG-WDM-810 Series WDM ITU Filter 100/200 GHz Fiber Bragg Grating

With narrow spectral bandwidth, this FBG is a good element for filtering optical signals. It is widely used as an optical add/drop multiplexer in WDM systems, allowing for high levels of Side-Lobe Suppression Ratio (SLSR) to prevent adjacent channel crosstalk in the system. These FBGs have a flat-top reflection spectrum and steep spectral drop-offs. The non-thermal encapsulation of these FBGs ensures wavelength stability of <0.16 nm in the temperature range from 0°C to $+70^{\circ}\text{C}$, which is essential for stable operation.

GTL-FBG-RL-880 Raman Laser Fiber Bragg Grating

Can be used to create highly efficient multi-stage Raman lasers based on phosphate-silicate fibers at different wavelengths. Compared to germanium-doped fibers, it allows for about three times the Raman shift. For many applications that require very precise measurements of small temperature or strain variations using acoustic waves, paired FBGs can enhance sensitivity.

GTL-FBG-FPI-810 Fabry-Pérot Interferometer Fiber Bragg Grating

This is a pair of FBGs that can detect very small phase shifts. By applying electrically, magnetically, or acoustically enhanced coatings on the fiber between the gratings, extremely small changes in these fields can be measured. For sensing purposes and to assess small vibrations or acoustic signals through interference measurement methods, a low-finesse Fabry-Pérot cavity is typically sufficient.

GTL-FBG-HE-810 High-Environment Fiber Bragg Grating

These FBGs can be provided as separate or different wavelength FBG chains,

enabling multi-point temperature monitoring. Various types of single-mode (SM) fibers and fiber coatings can be used to write these gratings. High-temperature acrylate-coated fibers are suitable for temperatures up to +150° C. Polyimide or metal (copper, aluminum) coated fibers are used for high-temperature applications up to +300° C and +500° C, respectively. With steel tube protection, our high-environment FBGs can be used at temperatures up to +700° C.

GTL-FBG-RH-880 Radiation-Hard Fiber Bragg Grating

Written with radiation-hard pure quartz core fibers, this FBG is well-suited for applications in the nuclear industry, aerospace, and other radiation-intensive environments.

The following configurations can be modified according to customer requirements to customize the fiber Bragg grating solution:

Parameter /PN#	GTL-FBG-WL-810 Wave length Locker FBGs	GTL-FBG-WDM-810 WDMITU Filter100/200GHz FBGs	GTL-FBG-RL-880	GTL-FBG-FPI-810 Fabry-Perot Interferometer FBGs	GTL-FBG-G-HE-810	GTL-FBG-G-RH-880
	Wavelength Locker FBGs		Raman Laser FBGs		Hard Environment FBGs	Radiation Hard FBGs
Wavelength Range [nm]	630-2300	1530-1565 (C-band) or custom 1510-1580	1240, 1270, 1484	600-2300		1000-2300
Quick Order Wavelength [nm]	30 values from 633 to 2300	-	-	-	30 values from 633 to 2300	-
Fiber Type	SM, PM, Custom	SM, Corning SMF-28	SM, PM, Dual-core, LMA, Custom	SM, PM, Dual-core, Radiation-resistant, Custom	SM, PM, Dual-core, LMA, Custom	SM, PM, Dual-core, Radiation-resistant, Custom
Reflectivity [%]	2-5, 10-20	10-99, Flat-top typical >99.5	5-99.9	0.5-99		

Bandwidth (FWHM) [nm]	0.3-0.8,0.1-0.15	100/200GHzon ITU For 100GHz:@-0.5dB>0.3nm, @-20dB0.65nm	0.15-1.2	0.3-0.8	0.15-0.8	0.3-0.5
Distance Between FBGs [mm]	-	-	-	1-200, Custom	-	-
Channel Isolation [dB]	-	-20	-	-	-	-
Insertion Loss [dB]	-	<0.15	-	-	-	-
Cladding Mode Loss [dB]	-	<0.5 (only for cladding mode suppression fiber)	-	-	-	-
Return Loss[dB]	~10	-	~8	-	~8	~8
FBG pigtail length[m]	≥0.5, custom					
FBG Coating	None, Acrylic, Polyimide, Aluminum, Copper, Customized	None, Acrylic, Polyimide, Customized		None, Acrylic, Polyimide, Aluminum, Copper, Customized.		
Tensile Strength [kpsi]	>100	-	>100			
Thermal Wavelength Stability(0 ° C-+70 ° C)[nm]	-	<0.16	-	-	-	-
Optical Connector	Bare Fiber, FC/APC, LC/APC, Custom					
Dimension sLxWxH[mm]	-	66×18×12	-	-	-	-